3455 Tylersville Road

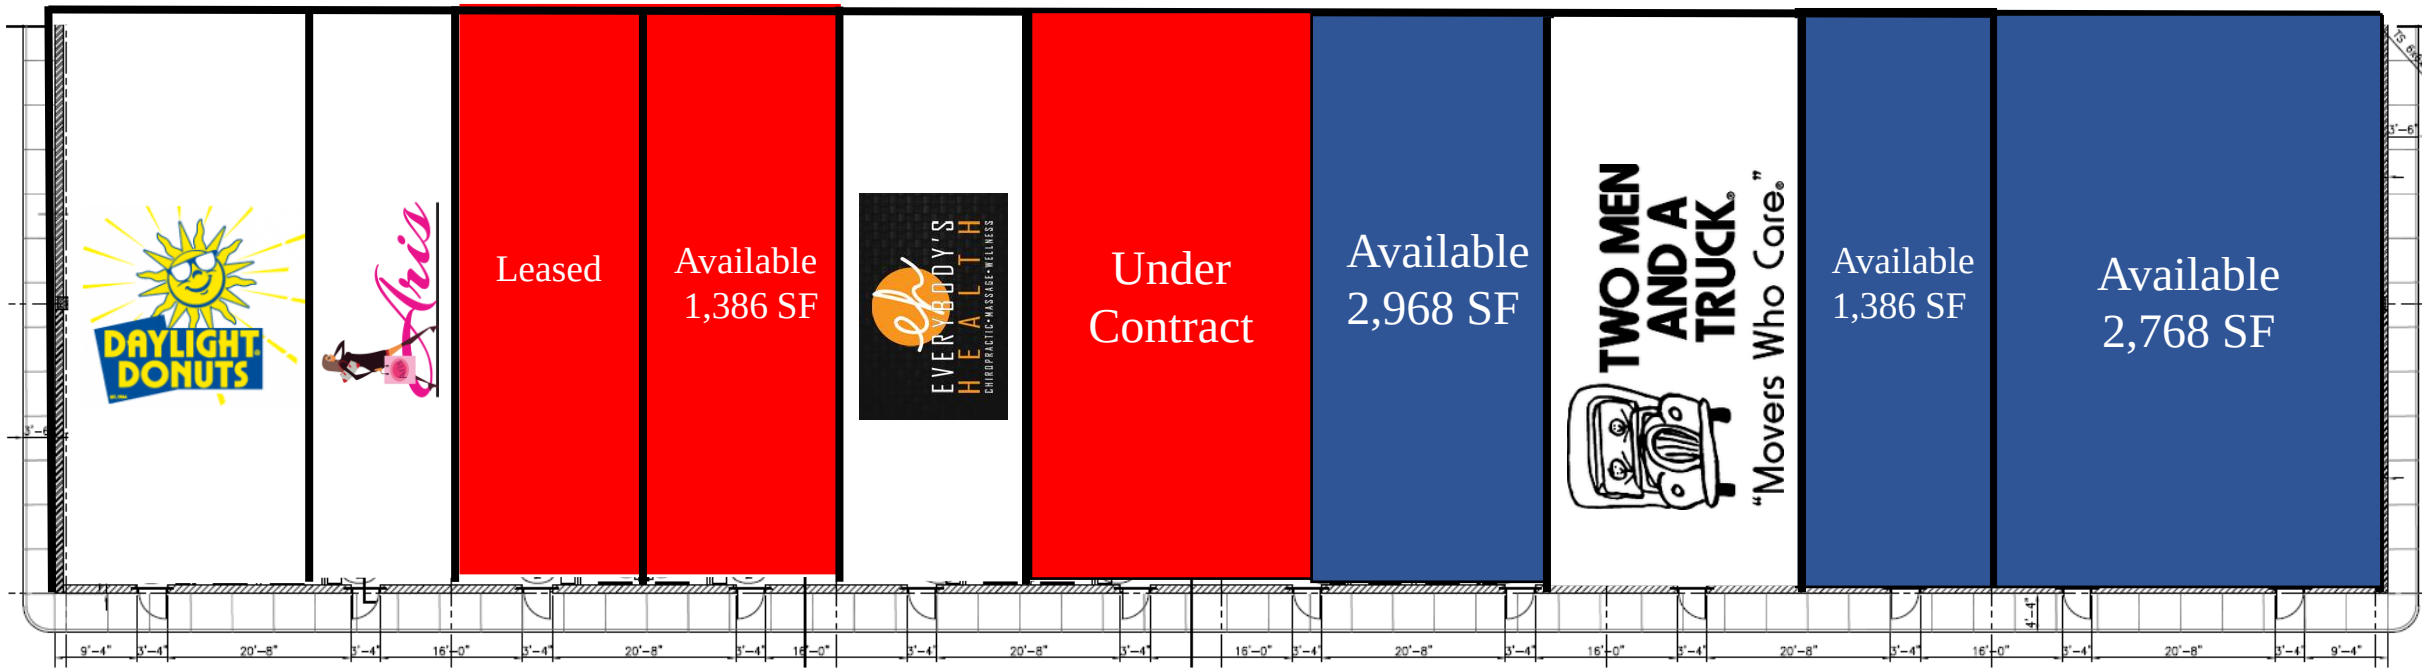

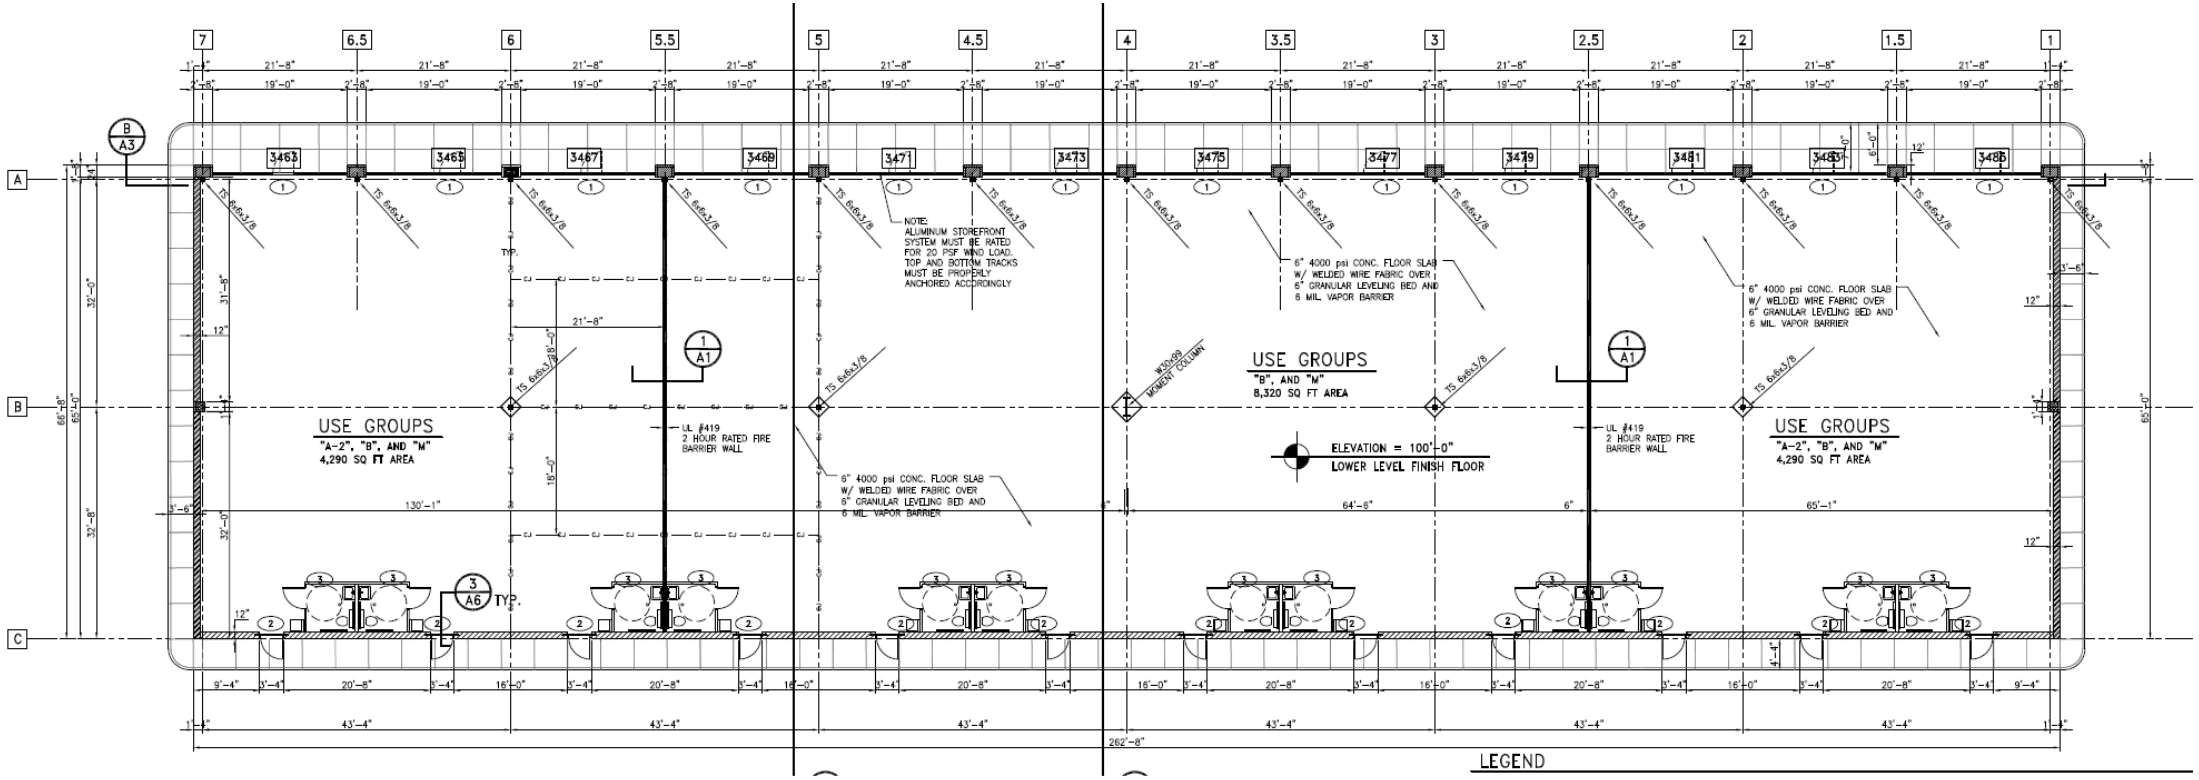
USE GROUPS
"A-2", "B", AND "M"
4,290 SQ FT AREA
USE GROUPS
"B", AND "M"
8,320 SQ FT AREA
USE GROUPS
"A-2", "B", AND "M"
4,290 SQ FT AREA
ELEVATION = 100'-0"
LOWER LEVEL FINISH FLOOR
UL #419
2 HOUR RATED FIRE
BARRIER WALL
NOTE:
ALUMINUM STOREFRONT
SYSTEM MUST BE RATED
FOR 20 PSF WIND LOAD.
TOP AND BOTTOM TRACKS
MUST BE PROPERLY
ANCHORED ACCORDINGLY
6" 4000 psi CONC. FLOOR SLAB
W/ WELDED WIRE FABRIC OVER
6" GRANULAR LEVELING BED AND
6 MIL. VAPOR BARRIER
W30x99
MOMENT COLUMN
TS 6x6x3/8
TYP.
262'-8"
43'-4"
130'-1"
64'-8"
65'-1"

LEGEND